

Art. 8401.2 Melting Tank Easy stainless steel base (au-bain marie)

Date last modified: 5-8-2022, Changes reserved for printing- and typing errors.

Product image



Product information

This tank heats according to the Au-Bain-Marie system (indirect heating). The water in this tank is heated by means of a thermostat-controlled element maintained at a variably set temperature of 30-100°C. This dipping set consists of a stainless steel pan with a plastic housing and an enamel insert.

Installation

1. Always place the tank on a stable surface.
2. Remove the plastic lid and then place the supplied insert pan.
3. Fill the tank with sufficient water. However, avoid flooding when placing the insert pan (approx. 11L).
4. Connect the device to an earthed socket with 230 Volt.
5. Check whether the device is still switched off. The thermostat must therefore be set to zero.
6. The melting tank is ready for commissioning.

Use of appliance

1. Make sure there is enough water in the tank. See point 3 of the 'installation' heading.
2. Fill the insert pan with paraffin beads.
3. Check whether there is sufficient water in the tank. The more water there is in the tank, the better the heat transfer is to melt the paraffin.

4. Switch on the thermostat to the desired temperature (approx. 70-80°C) and wait until the paraffin has completely melted.
5. When the paraffin is melted and at the right temperature, the dipping can begin.

Note!

Regularly check the amount of water in the tank and prevent it from boiling dry! The more water, the better the heat transfer. For long intervals of use, set the temperature back to 60°C. This is to maintain the quality of the paraffin and to save the melting tank. Always switch off the melting tank after use. Also remove the plug from the socket. This prevents anything from going wrong at all times. Never use the melting tank for improper use. This is to prevent damage and increase the lifespan. Improper use also invalidates the warranty.

Safety

The melting tank is protected against overheating and switches off automatically. After a while (cooling down), the thermostat can be switched on again.

Cleaning

1. Switch off the appliance and remove the plug from the socket.
2. To clean the insert pan, it is wise to have it as empty as possible.
3. Pour the last remaining paraffin from the insert pan and store it in a disposable container that is heat-resistant. This (solidified) remainder can be used again later on in the pan.
4. The insert pan is easy to clean with cleaning paper when the pan is warm.
5. When the inset pan has been rubbed clean, it can be cleaned even more with soapy water.
6. Rinse the soapy water well and dry the pan thoroughly before using it again.

7. Drain the water from the tank and rinse it clean.
8. The tank is then ready for use again.

Specifications

Volume tank	27Liter
Height tank	480mm
Depth tank	300mm
Diameter tank	350mm
Wattage	1800Watt
Voltage	230Volt
Thermostat setting	30-100°C
Maximum thermostat	✓

Warranty

The melting tank comes with a two-year warranty against material and construction defects, provided that the device has been used and maintained in accordance with the instructions. Also, the melting chain must not be mishandled or abused in any way. This only applies to parts, not to labor and transport. In the event of malfunctions, please contact your supplier in order to have the malfunction resolved with the original parts.

Warning: as this involves heating a liquid, operation of the melting tank should only be done by qualified personnel.


The device complies with EU directives 73/23 EEC and 89/336 EEC, all technical changes reserved.



Always read the manual before using the device



Electric scheme

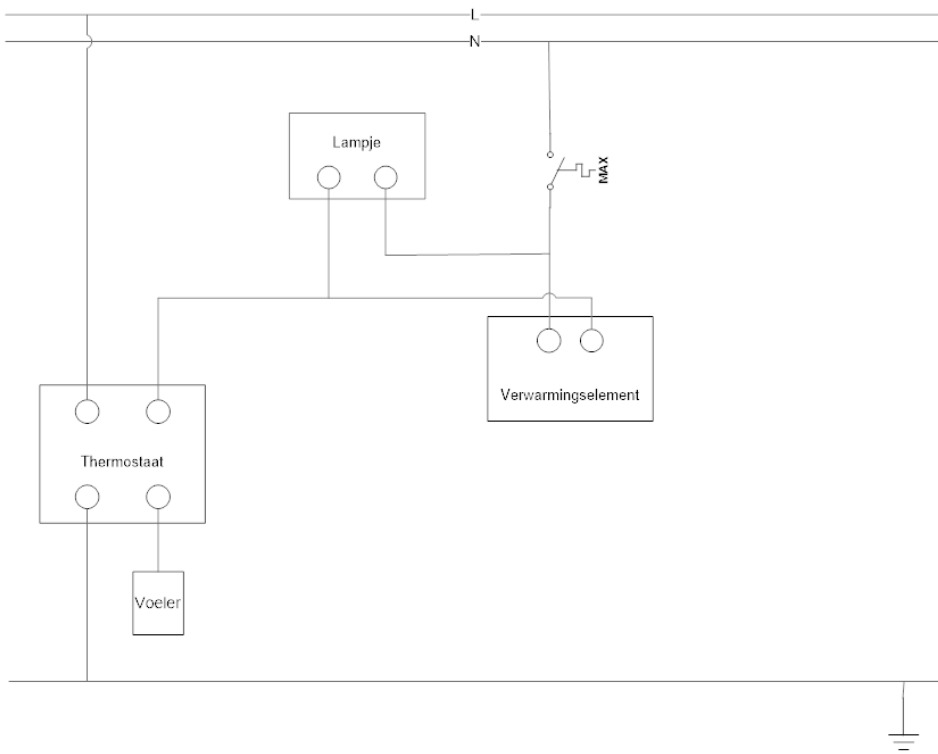

Always read the manual before using the device