

Art. 866g SH DUO Stainless Steel Melting Tank

Date last modified: 5-8-2022, Changes reserved for printing- and typing errors.

Product image



Product information

The SH Duo Stainless Steel Melting Tank works according to the Au-Bain-Marie system. This includes heating the product to be heated in a dipping can with hot water.

The water in this tank is heated by means of a thermostatically controlled element maintained at a variable temperature of 30-90°C.

Installation

1. Always place the tank on a stable surface.
2. Place the stainless steel dipping cans.
3. Check whether the device is still switched off. The thermostat must therefore be set to zero.
4. Connect the device to an earthed socket with 230 Volt.
5. The melting tank is ready for commissioning.

Use of appliance

1. Fill the tank with enough water until the filled dipping cans almost start floating. The more water there is in the tank, the better the heat transfer to melt the paraffin.
2. Switch on the thermostat to the desired temperature (approx. 70-80°C) and wait until the paraffin has completely melted.
3. The orange light is on during heating.

Note!

Regularly check the amount of water in the tank and prevent it from boiling dry! The more water, the better the heat transfer. For long intervals of use, set the temperature back to 60°C. This is to maintain the quality of the paraffin and to save the melting tank. The device is suitable for long-term, continuous use.

Never use the melting tank for improper use. This is to prevent damage and increase the lifespan. Improper use also invalidates the warranty.

Cleaning

1. Switch off the appliance and remove the plug from the socket.
2. To clean the dipping cans, it is wise to have them as empty as possible.
3. Pour the last remaining paraffin from the dipping cans and store it in a disposable container that is heat-resistant. This (solidified) remainder can be used again later on in the cans.
4. The dipping cans are easy to clean with cleaning paper when the canisters are warm.
5. When the dipping cans are clean, they can be cleaned extra with some soapy water.
6. Rinse the soapy water well and dry everything thoroughly before using it again.
7. The melting tank can be emptied and scrubbed after removing the dipping cans.
8. The tank is then ready for use again.

Fill with sufficient water and let the appliance cool down if the overheating protection has been activated. Unscrew the gray cover on the front and press the red reset switch firmly. The tank is now ready for commissioning.

Specifications

Length	680mm
Width	370mm
Height	680mm
Wattage	1000Watt
Voltage	230Volt
Thermostat setting	30-90°C
Variable layout	✓
Maximum security	✓

Warranty


The melting tank comes with a two-year warranty against material and construction defects, provided that the device has been used and maintained in accordance with the instructions. Also, the melting chain must not be mishandled or abused in any way. This only applies to parts, not to labor and transport. In the event of malfunctions, please contact your supplier in order to have the malfunction resolved with the original parts.

Warning: as this involves heating a liquid, operation of the melting tank should only be done by qualified personnel.


The device complies with EU directives 73/23 EEC and 89/336 EEC, all technical changes reserved.



Electric scheme

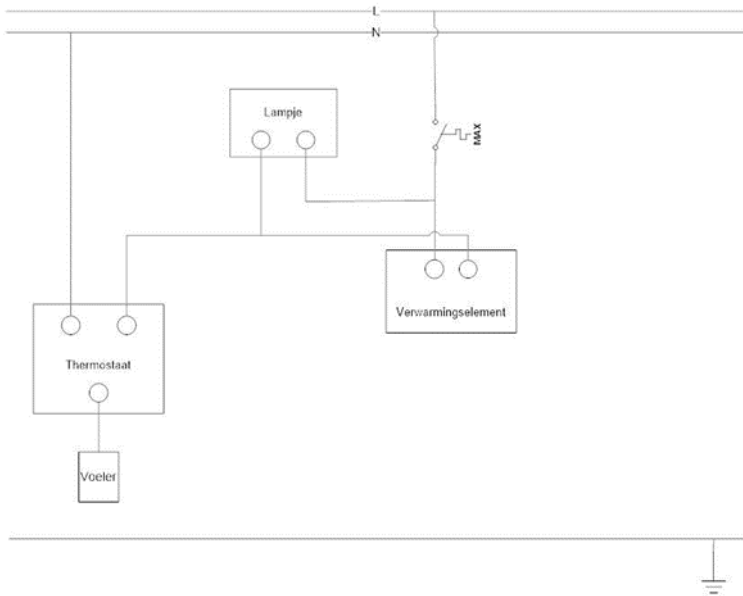

Always read the manual before using the device

 **SELLACQ**HOLLAND Morseweg 1 8503 AH JOURE T+31(0)513-499657 E info@sellacq-holland.nl

www.sellacq-holland.nl